

高性能快速排氣閥

快速型

Humphrey
 進口代理商品

規格：

型號	SQE (TAC級)	SQE1	SQE2	QE2	QE3	QE4	QE5		
進氣口in	M5(陰)	1/8"	1/4"	1/4"	3/8"	1/2"	3/4"		
配管口徑 輸氣口out	M5(陰)	1/8"	1/4"	1/4"	3/8"	1/2"	3/4"		
排氣口exh.	M5(陽)	1/4"	1/4"	3/8"	3/8"	3/4"	3/4"		
使用流體	空氣								
使用壓力範圍	MIN	0.2	0.3	0.3	0.2	0.14	0.07		
	MAX	8.6	10.7						
kgf/cm ²									
周圍溫度	-7~65°C			-30~80°C					
油潤滑	不需要								
充/排氣 時間sec. (註)	壓力供給 kgf/cm ²	充氣 0→5.6	(A)0.026	(A)0.036	(A)0.027	(B)0.170	(B)0.130	(C)0.537	(C)0.508
		排氣 7→1.4	(A)0.030	(A)0.022	(A)0.021	(B)0.160	(B)0.100	(C)0.440	(C)0.417

(註):空氣量需求:「A」表164cc,「B」表1640cc,「C」表16400cc


大氣壓下之空氣流量：

型號 流量值 LPM 使用壓力	SQE (TAC級)	SQE1	SQE2	QE2	QE3	QE4	QE5
2 kgf/cm ²	76.0	636.8	905.6	1273.5	1556.5		
3.5 kgf/cm ²	113.0	948.1	1330.1	1839.5	2264.0		
5.5 kgf/cm ²	198.0	1443.3	1981.0	2716.8	3537.5		
7.0 kgf/cm ²	232.0	1782.9	2405.5	3396.0	4386.5		
8.5 kgf/cm ²		2122.5	2943.2	4245.0	5377.0		

訂購代號：

例 **SQE1**


外觀尺寸：

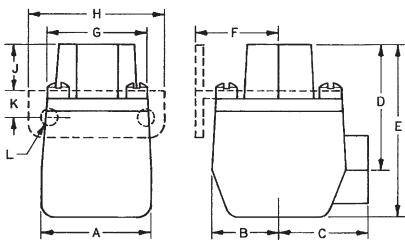


代號	A	B	C	D	E	F	G	H	J	K	L
SQE	此型尺寸在圖片旁										
SQE1, SQE2	27.7	13.9	20.5	30.9	42.4						
QE2, QE3	38.1	21.1	31.8	45.2	60.4	28.9	38.1	55.6	21.8	13.9	8.6
QE4, QE5	55.4	28.9	45.9	70.6	70.6	37.5	50.8	69.8	33.7	15.4	6.8

※屬固定座之尺寸代號

作動型式：

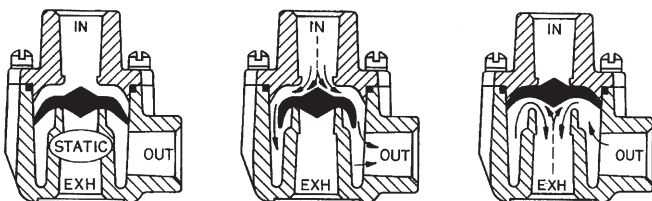

SQE



SQE1

1/8 Pipe

SQE2

1/4 Pipe





QE2

1/4 Pipe

QE3

3/8 Pipe



QE4

1/2 Pipe

QE5

3/4 Pipe

